

FOOT PUMPS

MODEL NOS: FP150 & FP300 Part Nos: 7640265 & 7640270

OPERATING INSTRUCTIONS

GC091

INTRODUCTION

Thank you for purchasing this CLARKE Foot Pump.

Before attempting to use the product, it is essential that you read this manual thoroughly and carefully follow all instructions given. In doing so you will ensure the safety of yourself and that of others around you, and you can also look forward to the product giving you long and satisfactory service.

ENVIRONMENTAL PROTECTION

Do not dispose of this product with general household waste. All tools, accessories and packaging should be sorted, taken to a re-cycling centre and disposed of appropriately.

GENERAL SAFETY PRECAUTIONS

- 1. Always thoroughly familiarise yourself with this product & its operation, and always read and understand the instructions and warnings in this manual before using the product.
- 2. Never allow children to use the foot pump.
- 3. Never over-inflate tyres, toys, balls, lilos etc.
- 4. Always use in a safe area away from traffic and other hazards.
- Always ensure that tyre pressure checks are carried out to the tyre manufacturers recommended pressures.
- 6. Never overstretch the connecting hose.

USING THE PUMP



WARNING: THE GAUGE IS ONLY TO BE USED AS A REFERENCE, ALWAYS CARRY OUT A FINAL CHECK OF THE TYRE PRESSURE WITH A GAUGE CONFORMING TO BS EN 12645.

TYRE INFLATION

- 1. Fully extend the hose and fix the tyre valve connector onto the vehicle tyre valve with the thumb lock, ensuring the valve is clean.
 - When connected correctly, the gauge will show the current pressure in the tyre. If this is the correct tyre pressure as stated in your vehicle handbook, remove the valve connector.
- 2. If the tyre is below the recommended pressure (as specified in your vehicle handbook), operate the pump until the pressure is achieved.








ADAPTORS

The pump is supplied with four adaptors for different uses. These are provided to inflate sports balls, air beds, small inflatables, bicycle and vehicle tyres etc. To avoid over-inflation, always follow manufacturer's instructions for the item to be inflated.

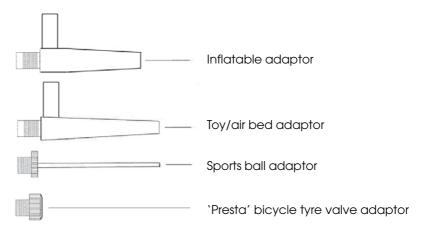

MAINTENANCE

Always inspect the pump before use to ensure the connecting hose is in perfect condition. Keep the pump clean by wiping with a dry cloth. DO NOT use solvent as a cleaning agent. Always store in a dry place.

GUARANTEE

This CLARKE product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt as proof of purchase. This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for its intended purpose.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission. This guarantee does not effect your statutory rights.

SPECIFICATIONS

	FP150	FP300
Dimensions L x D x H	350 x 90 x 640 mm	335 x 150 x 265 mm
Weight	1.1 kg	1.7 kg
Hose Length	630 mm	650 mm
Pressure Gauge	Scale 1: 0-100 psi	Scale 1: 0-100 psi
	Scale 2: 0-7 bar	Scale 2: 0-7 bar







PARTS & SERVICE: 0208 988 7400

E-mail: Parts@clarkeinternational.com or Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

CIAINE INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG www.clarkeinternational.com