

OM3




COMPACT FLOAT

- Industry
- Utilities
- Processing
- Cellars
- Basements
- Final effluent



The **OM3** pump is a strong and efficient pump in 304 stainless steel and thermoplastic. Excellent flow and head are produced from an energy efficient 150-watt motor, which makes it ideal for many domestic and industrial jobs, particularly cellar and processing duties. It is not recommended for ponds or water features. It is popular with water companies, who select it for its advanced features and reliability. The close, compact positioning of the optional, integral tube float switch (**OMA3**), is particularly suited to applications where a sump is narrow or where a traditional pendant type float's operation could be fouled. Long term, trouble free operation is enhanced further with an integral vent valve to prevent air locking. The 403 stainless steel shaft is fitted with an ultra hardwearing, double mechanical seal (inboard: silicon carbide-silicon carbide) – running in an oil chamber - and a semi-vortex, thermoplastic impeller. Supplied with 10 metres of heavy duty, rubber power cable.

Users of 230volts have the option to select from two versions: the “**domestic**” is supplied with a hose tail and a hose clip (for fitting to flexible discharge hose) and a 3 pin plug fitted with a 5 amp fuse. The “**industrial**” is supplied with a female BSP outlet (for fitting rigid waste pipe) but without a plug. 110volt pumps are supplied as “**industrial**”.

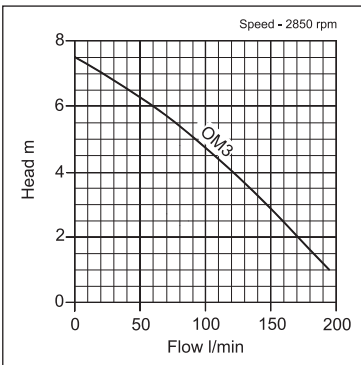

model	Manual or Auto	outlet (BSPF/mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	on level (mm)	off level (mm)	dry weight (kgs)	packing weight (kgs)	Price (£)	code
OM3 industrial	M	1½"	0.15	110-230	195	7.5	10	140x203x316	-	-	5.90	7.80	235.00	1
OMA3 industrial	A	1½"	0.15	110-230	195	7.5	10	177x203x319	251	81	6.10	8.10	262.00	1
OM3 domestic	M	32	0.15	230	195	7.5	10	140x203x316	-	-	5.90	7.90	240.00	1
OMA3 domestic	A	32	0.15	230	195	7.5	10	177x203x319	251	81	6.10	8.20	266.00	1