



KTVE

3 PHASE AUTO


The **KTVE** pumps offer an automatic option to the **KTV** series, without the need for external control panels and cumbersome float switches. A sensor probe is mounted in a durable, moulded rubber bracket and, for added protection, it is positioned within the footprint of the pump base. Once the water level reaches the probe, the pump will start and continue to operate for one minute after the water falls below it. However, if the water level touches the probe within this time, the "stop" signal is cancelled and the pump continues to run until the water is cleared.

All models are supplied with 20 metres of heavy duty rubber power cable, except the 0.75kW models which are supplied with 10 metres. All models are supplied with a threaded outlet and a hose connector. IDS (individually screened cable) is available, at an extra cost, on 3.7kW and 5.5kW models, for quarry and mining applications.

- Mines & quarries
- Construction
- Hire fleets
- Tunneling
- Industry
- Processing



KTVE22.2

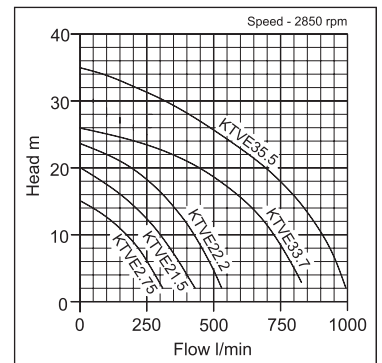

model	Manual or Auto	outlet (BSPM & mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	dia x h (mm)	on level (mm)	off level (mm)	dry weight (kgs)	packing weight (kgs)	Price (£)	code
KTVE2.75	A	2" & 50	0.75	400	320	15	6	Ø200x417	204	65	12.70	18.20	1,039.00	1
KTVE1.5	A	2" & 50	1.5	400	425	20	8.5	Ø240x486	235	80	22.00	28.30	1,588.00	1
KTVE22.2	A	2" & 50	2.2	400	525	24	8.5	Ø240x486	235	80	25.00	30.75	1,746.00	1
KTVE33.7	A	3" & 80	3.7	400	830	26	8.5	Ø285x585	297	90	40.00	46.90	2,499.00	1
KTVE35.5	A	3" & 80	5.5	400	980	35	8.5	Ø300x620	327	90	52.00	65.00	3,111.00	1