




KTZE

3 PHASE AUTO

The **KTZE** pumps offer an automatic option to the **KTZ** series, without the need for external control panels and cumbersome float switches. A sensor probe is mounted in a durable, moulded rubber bracket and, for added protection, it is positioned within the footprint of the pump base. Once the water level reaches the probe, the pump will start and continue to operate for one minute after the water falls below it. However, if the water touches the probe within this time, the “stop” signal is cancelled and the pump continues to run until the water is cleared. The **KTZE** design also includes a dual position outlet port, to enable the user to position the outlet hose in the required direction which may be horizontal or vertical and hence avoid kinking of layflat discharge hose.

All models are supplied with 20 metres of heavy duty rubber power cable, although IDS (individually screened cable) is available on most models, at an extra cost, for quarry and mining applications. Models are supplied with a threaded outlet and a hose connector.

- Mines & quarries
- Construction
- Hire fleets
- Tunneling
- Industry
- Processing

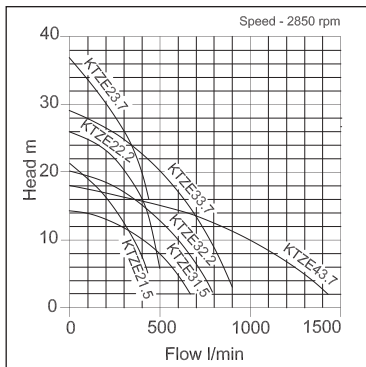

KTZE31.5

model	Manual or Auto	outlet (BSPM & mm)	kW	volt	flow (l/min)	head (mtrs)	free passage (mm)	w x l x h (mm)	on level (mm)	off level (mm)	dry weight (kgs)	packing weight (kgs)	Price (£)	code
KTZE21.5	A	2" & 50	1.5	400	425	21	8.5	216x235x609	345	120	40	48	1,420.00	1
KTZE31.5	A	3" & 80	1.5	400	670	14	8.5	216x235x609	345	120	39	47	1,420.00	1
KTZE22.2	A	2" & 50	2.2	400	500	26	8.5	216x235x629	355	120	42	50	1,585.00	1
KTZE32.2	A	3" & 80	2.2	400	800	20	8.5	216x235x629	355	120	41	49	1,585.00	1
KTZE23.7	A	2" & 50	3.7	400	440	37	8.5	252x283x747	435	150	71	79	2,220.00	1
KTZE33.7	A	3" & 80	3.7	400	900	29	8.5	252x283x757	435	150	71	79	2,220.00	1
KTZE43.7	A	4" & 100	3.7	400	1430	18	8.5	252x283x767	435	150	71	79	2,220.00	1