





MODEL NO: CBAT1 PART NO: 6260105

OPERATION & MAINTENANCE INSTRUCTIONS



ORIGINAL INSTRUCTIONS

DL1222 ISS 3





















INTRODUCTION

Thank you for purchasing this CLARKE product.

Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you, and you can look forward to your purchase giving you long and satisfactory

GUARANTEE

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission.

This guarantee does not effect your statutory rights.



























SAFETY INSTRUCTIONS



WARNING: HIGH VOLTAGES ARE PRESENT AT THE FOLLOWING POINTS: - THE IGNITION COILS, DISTRIBUTOR CAP, IGNITION CABLE, SPARK PLUGS.



CAUTION: PLEASE READ THESE INSTRUCTIONS AS WELL AS THOSE IN YOUR VEHICLE HANDBOOK VERY CAREFULLY BEFORE USING THE TESTER, KEEP THEM IN A SAFE PLACE FOR FUTURE REFERENCE.

- Clarke International are not liable for any damages or consequences resulting from:
 - Connection and installation errors.
 - Damage to the device due to mechanical influences or voltage surges or any modification to the device.
 - Any unauthorized manipulation to the product which would lead to cancellation of the guarantee.
 - Use of the device for purposes other than described in this instruction manual.
 - Any influence of fluids.
- Do not use the device in a moist or wet environment.
- 3. Do not use the tester close to flammable materials.
- 4. Do not use the tester in an explosive environment.
- Make sure the device is always positioned in a safe place.
 - The device must be placed out of reach of children.
 - Do not expose the device to direct sunlight or other heat source.
- 6. Store the tester in a safe, dry place after use.
- Do not try to use other cables with the product.



















CBAT1 12V LED Battery Alternator tester Iss 3 (010911105) (6260105).fm Page 4 Tues







- Do not open the case, there are no replaceable parts inside the product.
- If the product malfunctions, please consult your dealer.
- 10. Do not use the device while the vehicle is motion, the tester is not suitable for permanent installation in a motor vehicle.
- 11. Make sure the vehicle is securely parked and the handbrake applied before using the tester. For vehicles with automatic transmissions the "park position" must be engaged and the hand brake must be engaged.
- 12. Do not use other measuring devices when using the tester.
- 13. Seek professional help if you are unsure about anything related to the electrical system in your vehicle.

OTHER INFORMATION

- The Battery Tester is suitable for all types of lead acid batteries (car
- The device is not suitable for commercial purposes.
- The device is not calibrated.




























DISPLAY IDENTIFICATION

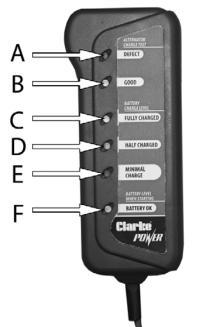



	_
4	Alternator Defect Indicator
В	Alternator Good Indicator
C	Battery Fully Charged Indicator
D	Battery Half Charged Indicator

E	Battery Minimal Charge Indicator
F	Battery OK Indicator Indicator
G	Clamps






















OPERATION

BATTERY CHECK

- Connect the red clamp to the positive (+) terminal on the car battery, then connect the black clamp to the negative (-) terminal.
 - The "Battery OK" LED (F) will light up if a voltage of at least 10V is detected.
- Remove the black clamp from the negative (-) terminal on the car battery then remove the red clamp from the positive (+) terminal.






BATTERY CONDITION WHEN STARTING THE VEHICLE

NOTE: The battery must be fully charged.

- Connect the red clamp to the positive (+) terminal on the car battery, then connect the black clamp to the negative (-) terminal.
- Start the vehicle. 2.
- During the starting process, when the starter motor is being used, the "Battery OK" LED (F) stays lit if the voltage does not drop below 10V.
 - If the "Battery OK" LED (F) does go out you should visit a professional automotive workshop.
- Remove the clamps in the reverse order.































ALTERNATOR CHECK

- Connect the red clamp to the positive terminal (+) of the battery, then connect the black clamp to the negative terminal (-).
 - Check that the measuring device has a good connection to the battery
- Start the engine and turn on the headlights and radio.
 - The "GOOD" LED (B) will light up if the alternator is producing the correct voltage.





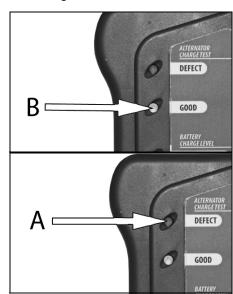




























BATTERY CHARGE LEVEL

- With the engine not running, (ignition key in the first position), turn on the headlights of the vehicle for approximately 1 to 2 minutes.
- Turn off the headlights and remove the ignition key. 2.
- 3. Now disconnect the negative terminal (-) on the car battery.
- After 10 minutes connect the red clamp to the positive terminal (+) of the battery, then connect the black clamp to the negative terminal (-) of the battery.
- Depending on the charge level of the battery, the LED indicates
 - FULLY CHARGED (C)

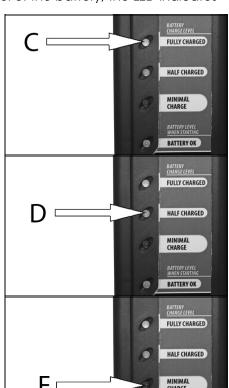

HALF CHARGED (D)

MINIMAL CHARGE (E)

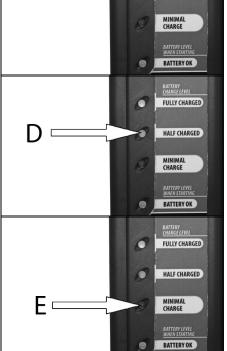



8



















MAINTENANCE

CLEANING

- Do not use any liquid cleaning product.
- Do not use any inflammable cleaning product.
- Do not submerge the device or spill any liquids over it.
- If needed, clean the device with a light, damp, soft cloth.

SPECIFICATION

Product Description	Alternator and battery tester
Part number	6260105
Input Voltage	12 V
Measurement (H x L x W)	18 x 123 x 52 mm
Product Weight	0,06 kg
Fuse	No fuse



 $Parts \& Service: 020 \ 8988 \ 7400 \ / \ E-mail: Parts@clarke international.com \ or \ Service@clarke international.com \ or$

























DECLARATION OF CONFORMITY

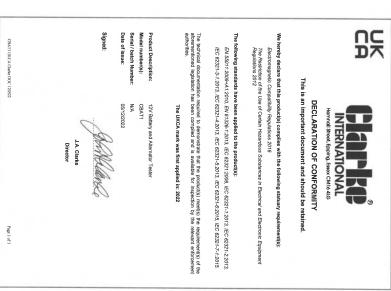

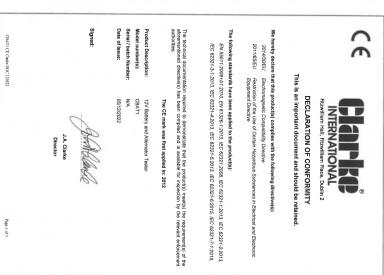

10























AVAILABLE FROM YOUR CLARKE DEALER




























Carre

QUALITY PRODUCTS

AIR COMPRESSORS

From DIY to industrial, Plus air tools, spray guns and accessories.

GENERATORS

Prime duty or emergency standby for business, home and leisure.

POWER WASHERS

Hot and cold, electric and engine driven - we have what you need

WELDERS

Mig, Arc, Tig and Spot. From DIY to auto/industrial.

METALWORKING

Drills, grinders and saws for DIY and professional use.

WOODWORKING

Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS

Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS

Submersible, electric and engine driven for DIY, agriculture and industry.

POWERTOOLS

Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS

All sizes for car and commercial use.







Parts Enquiries
Parts@clarkeinternational.com

Servicing & Technical Enquiries
Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clarke International Hemnall Street, Epping, Essex CM16 4LG













