



WORKBENCH WITH CABINET & DRAWER

MODEL NO: CWB1250

ASSEMBLY INSTRUCTIONS

ORIGINAL INSTRUCTIONS

GC0917

INTRODUCTION

Thank you for purchasing this CLARKE workbench.

Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you, and you can look forward to your purchase giving you long and satisfactory service.

Please keep these instructions in a safe place for future reference.

GUARANTEE

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended.

Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

ENVIRONMENTAL PROTECTION

Do not dispose of old products or damaged parts with general household waste. All tools, accessories and packaging no longer required should be sorted, taken to a recycling centre and disposed of appropriately.

ASSEMBLY

UNPACKING

Open the carton and lay out the components carefully, identifying them according to the parts list and diagram on pages 6 and 7.

Should any part be damaged or missing, please contact your Clarke dealer immediately for replacement.

CONSTRUCTION

The cabinet body is constructed from 6 panels plus the door. The top and bottom panels are identical, but the side panels are of two types, one with a shelf support and one without. The unit can be assembled either with the open shelf to the left or right, with the closed cupboard on the other side.

Care must be taken to ensure they are assembled correctly by taking note of the instructions and referring to the appropriate diagram.

All fixing bolts should be entered from the outside and secured on the inside by the flat washers and nuts provided. Assembly should be carried out with all nuts finger tight only - DO NOT tighten the nuts until the structure is fully assembled as described in the instructions.

You will find it easier and more comfortable to assemble the cabinet, complete with legs, on a workbench if available. Additionally, it is easier and quicker if an assistant screws on the nuts from inside the cabinet whilst the bolt is held on the outside.

NOTES:


- 1. Decide whether you require the enclosed cupboard to be on the left or right side of the assembly.
- 2. Assembly is simplified if an extra pair of hands is available.
- All fixing bolts should be finger tight ONLY, until the complete structure is assembled.
- 4. Assemble on a workbench with suitable free working area.

The assembly procedure is as follows:


THE CABINET

The front edge of each top/ bottom panel is folded to form a channel, as shown in fig 1.


- Lay one such panel, (channel facing downwards), with a side panel positioned alongside as shown.
- The bottom panel should sit on top of the lower lip of the side panel.
- 2. Secure with two bolts, flat washers and nuts.



- 3. Attach the opposite side panel in a similar manner.
- Add the centre panel, noting that the shelf support bracket must correspond with the bracket on the end panel.
- 5. Locate the door lower hinge pin into the hole in the lower panel, then place the top panel on top of the two side and centre panel as shown in Fig 2, locating the door top hinge pin in the hole in the upper panel as you do so.




- 6. Secure the top panel at the sides and centre with bolts, nuts & washers in the holes shown arrowed in Fig 2.
- 7. Lay the structure on its back so that you can easily bolt on the front legs as shown in Fig 3, tightening the fastenings only finger tight.
- With the two front legs bolted on, turn the structure over onto its front.
- Place the back panel in position and hold in place using a bolt through the centre hole only on the top and bottom panels. Secure with a washer and nut from inside the unit.
- Bolt on both the rear legs, securing the back panel as you do so.



- 11. Stand the structure on its feet and rock it to ensure that no particular part is under strain and so that it stands evenly. Check that the door opening is square and that the door closes freely. If not, adjust the structure by hand so that it is square, then proceed to tighten all the securing nuts.
- 12. Finally place the structure on its feet and test for stability, adjust any bolts, as necessary, and secure by tightening the nuts.

THE TABLE TOP

- Turn the table top face down and attach the two drawer runners as shown in fig 4, using three wood-screws each side in the predrilled holes in the table top.
- 2. The table is now ready to be assembled to the cabinet



3. With the table top remaining face down, position the cabinet on top with the feet uppermost.

NOTE: The front of the table top is the edge closest to the drawer runners. Take care to align this with the front of the cabinet.


- 4. Line up the holes in the legs with the pre-drilled holes in the table top and locate with wood-screws. Tighten fully.
- 5. Turn the structure back onto its feet.

THE DRAWER & SHELF

The drawer comprises:


2 x Side Panels, 1 x Front Panel, 1 x Back Panel, 1 x Bottom Panel

- Having identified the various parts as in Fig 5, bolt the side panels to the front panel as shown, then add the back panel with all fastenings only finger tight.
- Drop in the bottom panel and secure with bolts, nuts and washers.
- 3. Ensure the drawer is square before tightening all the nuts.



- 4. Slide the drawer into place beneath the table top.
- 5. Position the shelf on the shelf supports.

Your workbench is now fully assembled and ready for use.

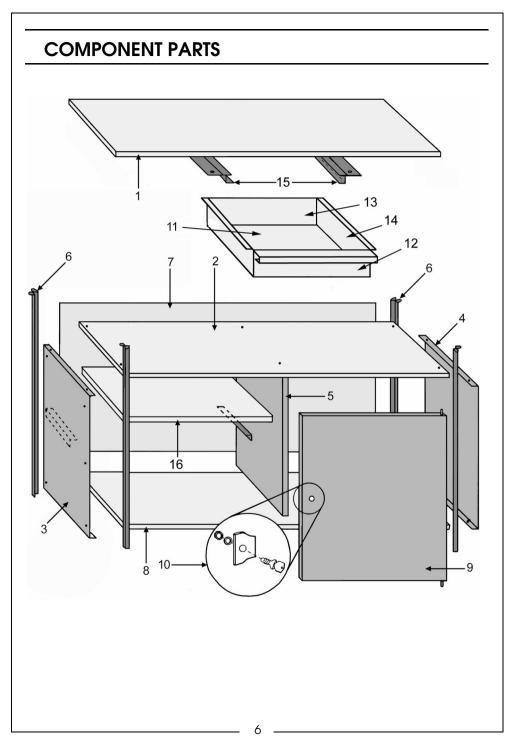

COMPONENT PARTS

Item	Description	Qty	Part No
1	Table Top	1	RO125001
2	Top Panel	1	RO125002
3	Left hand Side Panel	1	RO125003
4	Right Hand Side Panel	1	RO125004
5	Centre Panel	1	RO125005
6	Leg	4	RO125006
7	Rear Panel	1	RO125007
8	Bottom Panel	1	RO125008
9	Door Panel	1	RO125009
10	Door Lock Assembly	1	RO125010
11	Drawer Bottom	1	RO125011
12	Draw Front	1	
13	Drawer Back	1	
14	Drawer Side	2	
15	Drawer Runner	2	RO125014
16	Shelf	1	RO125015
	Woodscrew (runners)	6	RO125016
	Machine Screw	36	
	Flat Washer	36	
	Nut	36	
	Woodscrew (legs)	8	RO125017



PARTS & SERVICE: 0208 988 7400

E-mail: Parts@clarkeinternational.com or Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

CIAPLE INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG
www.clarkeinternational.com