



BUFFER/POLISHER

MODEL NO: CBB150

PART NO: 6500485

OPERATION & MAINTENANCE INSTRUCTIONS



ORIGINAL INSTRUCTIONS

GC11/20 -REV 2

INTRODUCTION

Thank you for purchasing this CLARKE buffer/polisher. Before attempting to use this product, please read this manual thoroughly and follow the instructions carefully. In doing so you will ensure the safety of yourself and that of others around you, and you can look forward to your purchase giving you long and satisfactory service.

SPECIFICATIONS

| | CBB150 |
|---------------------------|--------------------|
| Motor Power | 250W |
| Fuse Rating | 5 Amp |
| Rated Voltage / Frequency | 230V / 50Hz |
| Shaft Diameter | 12.7 mm |
| No Load Speed | 2850 rpm |
| Wheel Diameter | 150 mm |
| Dimensions | 210 x 480 x 220 mm |
| Weight | 8.9 kg |

GUARANTEE

This product is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the product is found to have been abused or tampered with in any way, or not used for the purpose for which it was intended. Faulty goods should be returned to their place of purchase, no product can be returned to us without prior permission. This guarantee does not effect your statutory rights.

ENVIRONMENTAL PROTECTION



Through purchase of this product, the customer is taking on the obligation to deal with the WEEE in accordance with the WEEE regulations in relation to the treatment, recycling & recovery and environmentally sound disposal of the WEEE.

In effect, this means that this product must not be disposed of with general household waste but according to the laws governing Waste Electrical and Electronic Equipment (WEEE) at a recognised disposal facility.

POWER TOOL SAFETY WARNINGS

WORK AREA

- Keep the work area clean and well lit. Cluttered and dark areas invite accidents.
- DO NOT operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Power tools create sparks which may ignite the dust or fumes.
- 3. **Keep children and bystanders away while operating a power tool.** Distractions can cause you to lose control.

ELECTRICAL SAFETY

- Power tool plugs must match the outlet. Never modify the plug in any way.
 Do not use adapter plugs with earthed (grounded) power tools. Unmodified plugs and matching outlets will reduce the risk of electric shock.
- DO NOT expose power tools to rain or wet conditions. Water entering a power tool will increase the risk of electric shock.
- DO NOT abuse the power cable. Never use it for carrying, pulling or unplugging the power tool. Keep the power cable away from heat, oil, sharp edges or moving parts. Damaged or entangled cables increase the risk of electric shock.
- When operating a power tool outdoors, use an extension cable suitable for outdoor use. Use of a cable suitable for outdoor use reduces the risk of electric shock.
- If operating the power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.

PERSONAL SAFETY

- Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating power tools may result in personal injury.
- 2. **Use safety equipment. Always wear eye protection.** Safety equipment such as dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions will reduce personal injuries.
- 3. **Avoid accidental starting**. Ensure the switch is in the off position before plugging in. Carrying power tools with your finger on the switch or plugging in power tools that have the switch on invites accidents.

- 4. Remove any wrench before turning the power tool on. A wrench left attached to a rotating part may result in personal injury.
- 5. **DO NOT overreach.** Keep proper footing and balance at all times. This enables better control of the power tool in unexpected situations.
- Dress properly. Do not wear loose clothing or jewellery. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewellery or long hair can be caught in moving parts.

POWER TOOL USE AND CARE

- DO NOT force the power tool. Use the correct accessories for your application. The correct power tool will do the job better and safer at the rate which it was designed.
- 2. **DO NOT use the power tool if the switch does not turn it on and off.** Any power tool that cannot be controlled with the switch is dangerous and must be repaired.
- 3. Disconnect the plug from the power source before changing accessories, or storing power tools. Such preventive safety measures reduce the risk of starting the power tool accidentally.
- 4. Store idle tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate it. Power tools are dangerous in the hands of untrained users.
- 5. **Maintain power tools**. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use. Many accidents are caused by poorly maintained power tools.
- 6. Use the power tool and accessories in accordance with these instructions and in the manner intended, taking into account the working conditions and the work to be performed. Use of the power tool for operations different from intended could result in a hazardous situation.
- 7. The performance of this tool may vary, depending upon variations in line voltage. Extension cable usage may also affect performance.

SERVICING

 Have your power tool serviced by qualified service personnel using only identical replacement parts. This will ensure that the safety of the power tool is maintained.

BUFFER/POLISHER SPECIFIC WARNINGS

1. **DO NOT** get the buffer/polisher wet or use in damp or wet locations.

- DO NOT switch the buffer/polisher on whilst the wheel is in contact with the workpiece.
- Avoid polishing dissimilar metals with the same buffing wheel; galvanic corrosion may occur.
- DO NOT touch the workpiece immediately after polishing as it may be very hot.
- DO NOT touch the buffing wheel whilst operating or whilst plugged into the mains power.
- 6. **DO NOT** leave the buffer/polisher running unattended.
- 7. **DO NOT** operate the buffer/polisher when you are tired or under the influence of alcohol, drugs or intoxicating medication.
- 8. When not in use, switch the buffer/polisher off and remove the plug from the power supply.

SAFETY SYMBOLS

| | Read the manual and safety instructions before use | | Eye protection should be worn |
|---|---|--|----------------------------------|
| | Ear protection should be worn | | Dust mask should be worn |
| À | HAZARD, Motor gets hot | | |

The above safety symbols are displayed on the machine.

ELECTRICAL CONNECTIONS



WARNING: READ THESE ELECTRICAL SAFETY INSTRUCTIONS FULLY BEFORE CONNECTING THE PRODUCT TO THE MAINS SUPPLY.


This product is provided with a standard 13 amp, 230 volt (50Hz), BS 1363 plug, for connection to a standard, domestic electrical supply. Should the plug need changing, make sure that a plug of identical specification is used.



WARNING: THE WIRES IN THE CABLE ARE COLOURED AS FOLLOWS: BLUE = NEUTRAL BROWN = LIVE YELLOW AND GREEN = EARTH

If the colours of the wires in the power cable do not correspond with the markings on the terminals of your plug, proceed as follows.

- Connect the **blue** wire to the terminal which is marked **N**.
- Connect the brown wire to the terminal which is marked L.
- See the specification table for the correct fuse size.




AN APPROVED RESIDUAL CURRENT DEVICE (RCD) WHICH HAS A TRIPPING CURRENT OF LESS THAN 30MA MUST BE USED.

If you are not sure, consult a qualified electrician. DO NOT try to do any repairs.


ASSEMBLY

MOUNTING THE MACHINE

- Bolt the buffer/polisher to a workbench using the securing holes shown.
 - Check that all assembly nuts and bolts are secure before turning the machine on.
 - DO NOT block the ventilation paths through the base.



FITTING BUFFING/POLISHING PADS

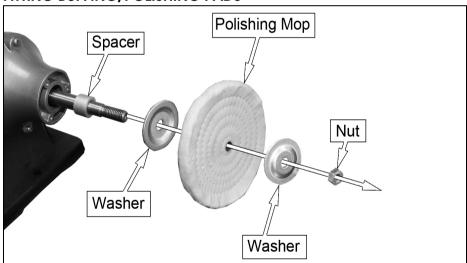

- 1. Place the spacer over the shaft.
- Place the polishing mop between the washers and secure with the retaining nut, hand tight.
 - The shaft threaded ends are handed LH and RH.
- 3. Tighten the nuts enough to grip without crushing the buffing/polishing pad.


NOTE: Wheel rotation, in use, will tighten the retaining nut.

USING YOUR BUFFER/POLISHER



WARNING: BEFORE COMMENCING WORK, ENSURE YOU HAVE READ AND UNDERSTOOD ALL OF THE SAFETY INSTRUCTIONS

- 1. Plug the buffer/polisher into the mains power supply.
- 2. Switch the buffer/polisher on
- 3. Slowly bring the workpiece into contact with the polishing mop.
 - See the image on the right to determine the safest and best position for contact with the wheel.
 - DO NOT contact the wheel outside of the quadrant.



4. After use, unplug the buffer/polisher from the mains power supply, and clean the machine ready for next use.

MAINTENANCE



WARNING: MAKE SURE THAT THE BUFFER/POLISHER IS UNPLUGGED FROM THE MAINS POWER SUPPLY BEFORE PERFORMING ANY MAINTENANCE.

- 1. Regularly inspect the buffing/polishing pad. Replace when worn.
- 2. Keep the buffer/polisher clean and dry. DO NOT use abrasives.
- 3. The motor and bearing are sealed units and require no maintenance.

CLEANING & STORAGE

- Clean the exterior the machine if required using a mild detergent or mild solvent.
- 2. Never immerse the buffer/polisher in water.
- 3. Keep any cooling vents in the buffer/polisher free of debris.


REPLACEMENT POLISHING MOPS

| | TYPE | PART No |
|-----------------------------------|----------|---------|
| 150 mm REPLACEMENT POLISHING MOPS | OPEN | 6500486 |
| | STITCHED | 6500487 |

COMPONENT PARTS

| 1 | Nut M12 (Left-hand tread) |
|----|--------------------------------|
| 2 | Retaining disc |
| 3 | Less thread buffing wheel |
| 4 | Spacer bush |
| 5 | Nut M5 |
| 6 | End cap |
| 7 | Corrugated retainer |
| 8 | Bearing 6202 |
| 9 | Power cable & plug |
| 10 | Rubber sleeve |
| 11 | Multi-wire cloth buffing wheel |
| 12 | Rotor |
| 13 | Nut M12 |
| 14 | Stator |
| 15 | Philips screw & washer M5x200 |
| 16 | Ext tooth lock washer |
| 17 | Philips screw & washer M4x8 |

| 18 | Power cable gland |
|----|------------------------------|
| 19 | Switch |
| 20 | Philips screw M5x8 |
| 21 | Switch board |
| 22 | Base |
| 23 | Nut M8 |
| 24 | Capacitor bracket |
| 25 | Capacitor |
| 26 | Philips screw & washer M6x20 |
| 27 | Base plate |
| 28 | Rubber foot |
| 29 | Philips screw & washer M4x12 |
| 30 | Cable clip baseplate |
| 31 | Philips screw M6 x 16 |
| 32 | Strain relief baseplate |
| 33 | Strain relief plate |
| | |

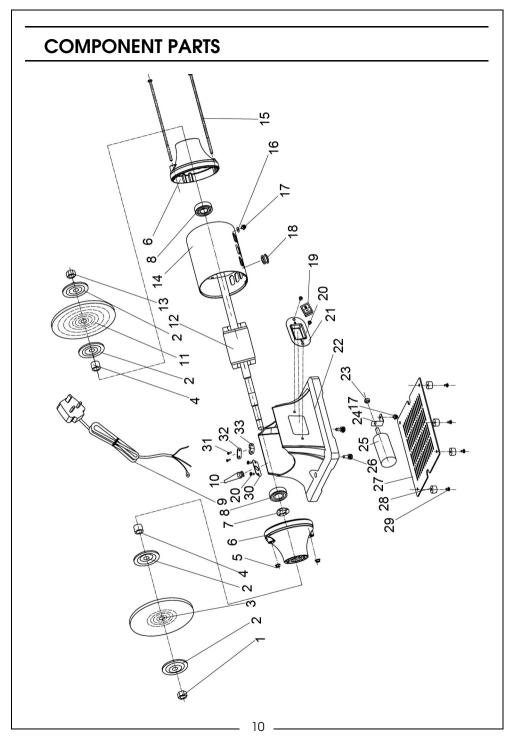

Parts & Service: 020 8988 7400 / E-mail: Parts@clarkeinternational.com or Service@clarkeinternational.com

DECLARATION OF CONFORMITY





Hemnall Street, Epping, Essex CM16 4LG

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following directive(s):

2014/30/EU Electromagnetic Compatibility Directive.

2006/42/EC Machinery Directive.

2011/65/EU Restriction of Hazardous Substances, (amended by 2015/863).

The following standards have been applied to the product(s):

EN 62841-1:2015, EN 62841-3-4:2016+A11:2017+A12:2020, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 55014-2:2015, EN 55014-1:2017.

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned directive(s) has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2018

Product Description: 150mm Buffer

Model number(s): CBB150

Serial / batch Number: N/A

Date of Issue: 10/11/2020

Signed:

J.A. Clarke Director

D O C 17-0530 150mm Buffer (rv 1)No20-0129

Page 1 of 1

A SELECTION FROM THE VAST RANGE OF







POWER WASHERS

Hot and cold, electric and engine driven - we have what you need

WELDERS

Mig, Arc, Tig and Spot. From DIY to auto/industrial.

METALWORKING

Drills, grinders and saws for DIY and professional use.

WOODWORKING

Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS

Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS

Submersible, electric and engine driven for DIY, agriculture and industry.

POWER TOOLS

Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS

All sizes for car and commercial use.



PARTS & SERVICE: 0208 988 7400

Parts Enquiries Parts@clarkeinternational.com

Servicing & Technical Enquiries Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clark Content of the International Hernall Street, Epping, Essex CM16 4LG www.clarkeinternational.com