



INSTRUCTIONS FOR:
**OIL DISPENSING
 SYSTEM AIR OPERATED**
 Model No: **AK4561D**

Thank you for purchasing a Sealey product. Manufactured to a high standard this product will give you years of trouble free performance if these instructions are carefully followed and the product is correctly maintained.



IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS AND CAUTIONS. USE THIS PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. PLEASE RETAIN THESE INSTRUCTIONS FOR FUTURE USE.

1. SAFETY INSTRUCTIONS

- p **WARNING!** Ensure health & safety, local authority, and general workshop practice regulations are strictly adhered to when using this equipment.
- 3 Familiarise yourself with product application and limitations, as well as the specific potential hazards peculiar to this product.
- 3 Maintain the pump station in good condition (use an authorised service agent).
- 3 Replace or repair damaged parts. *Use genuine parts only. Non authorised parts will invalidate the warranty.*
- 3 Use only to pump lubricants up to SAE 150 viscosity, used oil and antifreeze liquids.
- 3 Ensure safety eye protection, oil resistant gloves and protective clothing are worn when using this product.
- 3 Keep the work area clean, uncluttered and ensure there is adequate lighting.
- 3 Maintain correct balance and footing. Ensure the floor is not slippery and wear non slip shoes.
- 3 Keep children and unauthorised persons away from the working area.
- 3 After use, drain any fluids from the equipment before storage.
- 3 Dispose of waste liquids in accordance with local authority regulations.
- 3 Disconnect air pressure from equipment when not in use.
- 7 **DO NOT** exceed the maximum air pressure of 115psi.
- 7 **DO NOT** point the nozzle at people or animals.
- 7 **DO NOT** use the equipment near open flames.
- 7 **DO NOT** smoke whilst using this equipment.
- 7 **DO NOT** use to extract corrosive fluids.
- 7 **DO NOT** dismantle, tamper with or adapt the pump for any purpose other than for which it is designed.
- 7 **DO NOT** use the unit if it has been dropped or mishandled, check the unit to ensure there is no damage.
- 7 **DO NOT** leave the trolley on a slope, or traverse slopes, which may cause the unit to topple.
- 3 The unit must be stored on a level surface.
- 3 Keep the pump clean and store in a safe dry, childproof location.
- p **WARNING! DO NOT** allow uncontrolled discharge of fluids thus polluting the environment. All liquids must be disposed of according to local authority regulations.

2. INTRODUCTION

Mobile oil dispensing unit with air operated 3:1 double acting pump for barrel or tanks with 2" BSP fittings. Pump is supplied with air management system and connected to a 940mm rigid suction probe with non-return valve. Features 4mtr hose and digital oil meter Model No. AK4565D. Suitable for use with engine, hydraulic, synthetic, gear and transmission oils up to SAE150.

| | |
|---------------------------|-----------|
| Air Operated Pump | |
| Model: | AK4561D |
| Pump Ratio: | 3:1 |
| Maximum Flow Rate: | 12ltr/min |
| Maximum Viscosity: | 150SAE |
| Maximum Output Pressure: | 350psi |
| Maximum Air Pressure: | 115psi |
| Recommended Air Pressure: | 70psi |
| Outlet: | 1/2" BSP |
| Trolley Maximum Capacity: | 220kg |

| | |
|------------------------|------------------------|
| Digital Hose End Meter | |
| Model: | AK4565D |
| Accuracy: | +/- 0.5% |
| Inlet: | 1/2" BSP |
| Battery: | Lithium CR2 3V 1400mAH |



3. ASSEMBLY

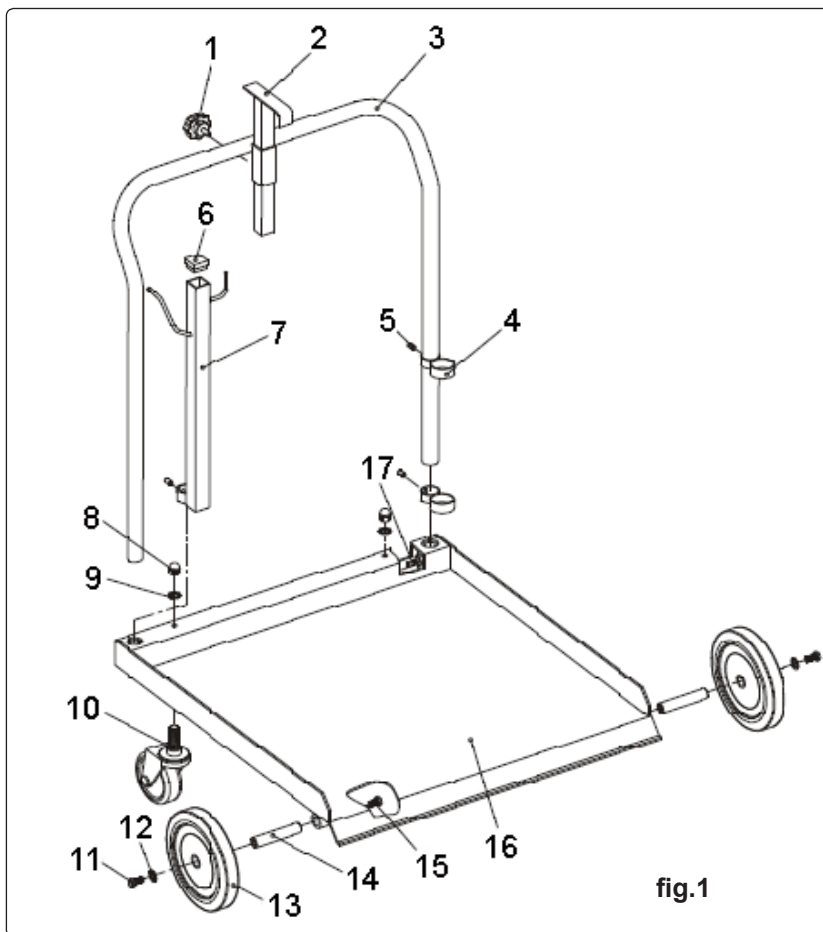


fig.1

3.1 Trolley Assembly (fig.1)

- 3.1.1 Attach the two castor wheels (10) to the base plate (16) using washers (9) and nuts (8).
- 3.1.2 Turn the base plate upside down and attach the axles (14) to the base plate using hex bolts (15) and then slide the wheels (13) onto the axles and secure using washers (12) and hex bolts (11). Turn the base plate over so that it is now supported on its wheels.
- 3.1.3 Slide the two pump support brackets (4) onto the handle (3) and attach them using hex grub screws (5).
- 3.1.4 Slide the accessory support (7) onto the other side of the handle and attach using hex grub screw (5), insert stopper (6) into the top of the accessory support.
- 3.1.5 Slide the handle assembly into the base plate until it bottoms out on the stops and secure with two hex grub screws (17).
- 3.1.6 Slide the drum holder support into the handle and secure using knob (1).
- 3.1.7 Adjust the pump support brackets, so that they fully support the pump assembly and check all nuts are tight.

3.2 Pump and Air Regulator/Lubricator Assembly

- 3.2.1 Apply a small amount of liquid thread sealant onto the threads of the air inlet of the pump and attach the air regulator/lubricator (fig.2).
- p **WARNING! DO NOT** allow thread sealant to enter the pump.
- 3.2.2 Attach the outlet pipe to the male outlet thread on the pump and attach the male threaded end of the pipe to the Digital Hose End Meter.
- 3.2.3 Attach the nozzle valve pipe assembly to the outlet of the Digital Hose End Meter.
- p **WARNING! DO NOT** overtighten the swivel connections.
- 3.2.4 Slide the locking nut, locking ring and the barrel nut onto the pick up probe of the pump (fig.3), screw the locking nut onto the barrel nut to lock the assembly to the pick up probe.
- 3.2.5 Insert the pump assembly into the support brackets on the trolley and hang the meter onto the accessory support bracket.

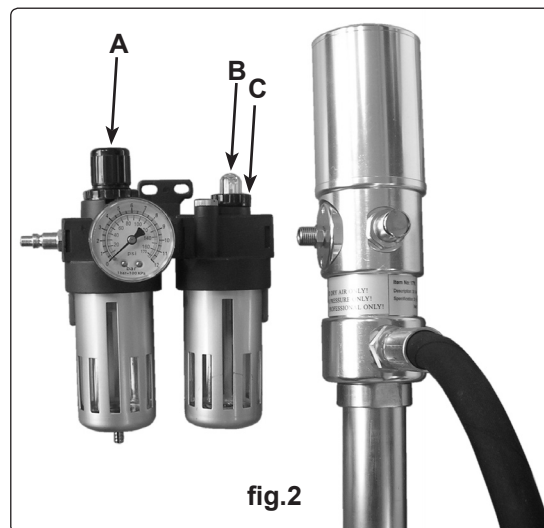


fig.2

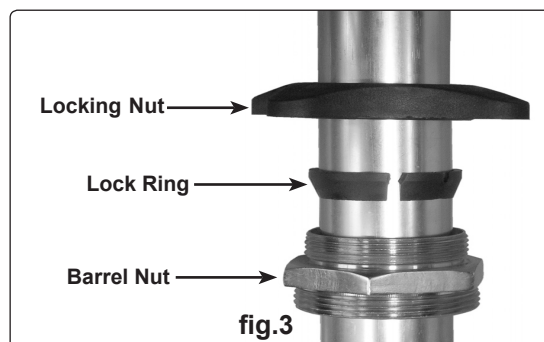


fig.3

3.3 Pre-Operation

- 3.3.1 Lift up the knob (fig.2A) on the air regulator and ensure that the knob is wound fully anti-clockwise.
- 3.3.2 Remove the filler plug (fig.2B) from the lubricator and fill the lubricator with a quality air tool oil (Sealey ATO1000S), refit the filler plug.
- 3.3.3 The lubricator feed is set when the unit is running, adjust the feed knob (fig.2C) the drip rate can be seen through the sight glass of the dome. The rate of oil feed will automatically increase or decrease inline with the air flow.

4. OPERATION

- 4.1 Place a 205ltr drum onto the trolley, locate the drum using the drum holder support (fig1.2) and secure with knob (fig.1.1).

4.2 Installing the pump

- 4.2.1 Remove the bung from the 2"BSP opening of the drum.
- 4.2.2 Slacken off the locking nut on the pump probe and insert the pump into the drum until the probe bottoms out, tighten the barrel nut and then tighten the locking nut to fix the pump to the drum.

4.3 Setting up the pump

- 4.3.1 Ensure that the air regulator valve is fully wound anti-clockwise and then connect the air supply onto the quick release connector on the air regulator.
- 4.3.2 Lift the knob on the regulator and slowly turn clockwise until the recommended operating pressure of 70psi is reached, push down on the regulator knob to lock the position.

Note: Check the system for leaks, should an air leak be discovered, release the pressure, disconnect the air line and repair the joint or seal before continuing.

4.4 Operating the gun

- WARNING!** Ensure that the trigger is not depressed before opening the nozzle valve.
- 4.4.1 Press the Reset button for 1 sec to zero the display.
- 4.4.2 With the nozzle pointing into the receiving container, open the nozzle valve as shown in fig.4.
- 4.4.3 Depress the trigger and dispense the liquid the amount dispensed is shown on the display (fig.5.4).
- 4.4.4 Release trigger and close the nozzle valve.

4.5 Determining the Correction Factor

- 4.5.1 Dispense at least 1 litre of liquid into a calibrated container.
- 4.5.2 Record the quantity of liquid in the container and record the quantity of liquid dispensed as indicated on the meter display. Press the Move + Reset buttons (fig.5.1 and fig.5.2) simultaneously to display the current correction factor.

$$\frac{\text{Qty Dispensed}}{\text{Qty Indicated}} \times \text{Current Correction Factor} = \text{New Correction Factor.}$$

4.6 Programming the Correction Factor

- 4.6.1 Remove the rubber protective cover from the meter and unscrew the four phillips screws (fig.6) holding the digital meter, remove from the gun.
- 4.6.2 Press button "2" on the rear of the meter (fig.7.2) for 1 sec to enter the Correction Factor mode.
- 4.6.3 Press the Move button to select the digit to be changed, each press of the Move button will select the next digit.
- 4.6.4 Press the Reset button to add 1 on the digit, press as many times as required until the correct number is reached.
- 4.6.5 Press "2" for 1 sec to quit the Correction Factor mode.
- 4.6.6 Press the Move + Reset buttons simultaneously to display the new correction factor.

4.7 Changing the Units

- Note:** The meter is pre-set to display litres.
- 4.7.1 Press button "2" on the rear of the meter for 1 sec to enter the Correction Factor mode.
- 4.7.2 Press the Move button five times to select the units (fig.5.3).
- 4.7.3 Press the Reset button to scroll through the Units (L/Gal/PT/QT), select the Unit required.
- 4.7.4 Press "2" for 1 sec to quit the Correction Factor mode.

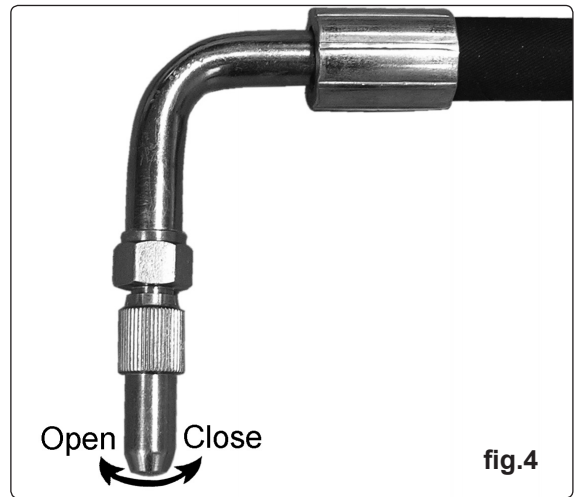


fig.4

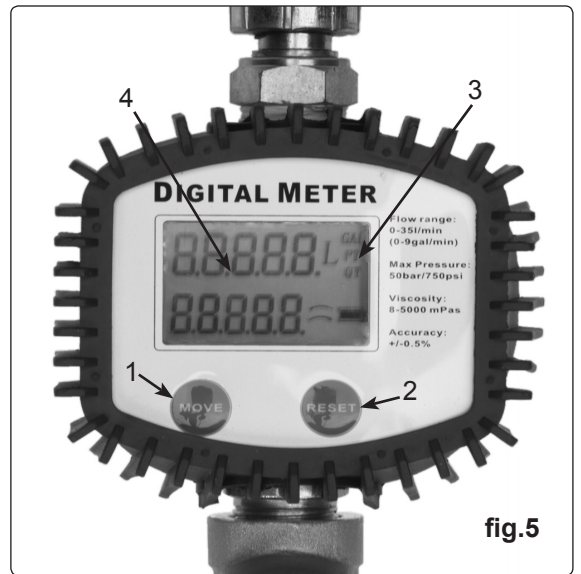


fig.5

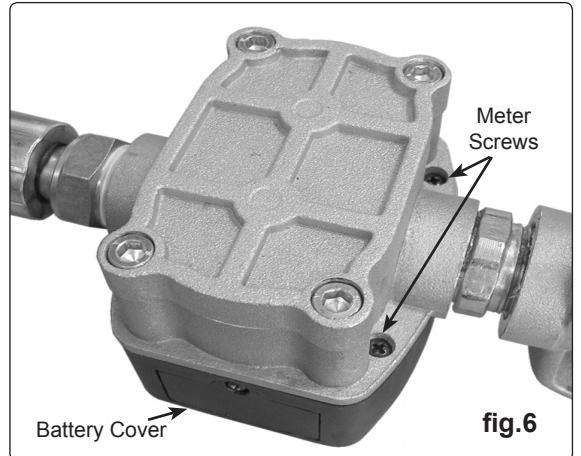


fig.6

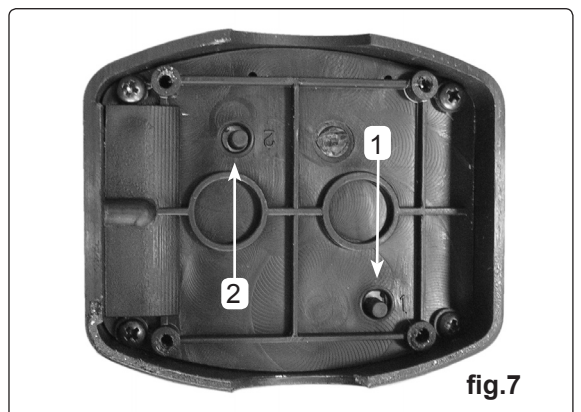


fig.7

5. MAINTENANCE

5.1 Changing the Digital Meter Battery

- 5.1.1 Remove the rubber protective cover from the meter.
- 5.1.2 Remove the screw and cover from the side of the meter.
- 5.1.3 Remove and replace battery (fig.8).
- 5.1.4 Replace cover and secure with screw.
- 5.1.5 Replace the protective rubber cover.

Note: If the LCD display does not activate, remove the meter as in section 4.3.1, press button 1 (fig.7.1) to reboot the meter.

- 5.2 Before every use visually check the supply hose for damage and check all joints for leaks, any damaged component must be replaced or leaks repaired before using.
 - 5.3 Check the nozzle valve for leaks, if it does not seal, replace before using.
 - 5.4 Drain air regulator water trap daily.
 - 5.5 Top up lubricator as required, using a quality air tool oil.
 - 5.6 To change the silencer, remove the circlip (fig.9) and remove the old silencer, place a new silencer into the recess and refit the circlip.
- Note:** For any other maintenance and repairs the unit should be returned to your Sealey dealer.



fig.8

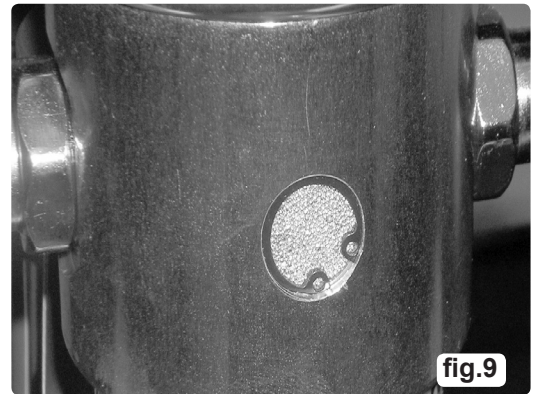


fig.9

6. DECLARATION OF CONFORMITY

Declaration of Conformity We, the sole importer into the UK, declare that the product listed below is in conformity with the following standards and directives

**Oil Dispensing System
Air Operated**
Model: AK4561D
2002/95/EC RoHS Directive
2002/96/EEC WEEE Directive

Signed by Steve Buckle  14th November 2008

For Jack Sealey Ltd. Sole importer into the UK of Sealey Power Products.

The construction file for this product is held by the Manufacturer and may be inspected on request by contacting Jack Sealey Ltd.

NOTE: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

IMPORTANT: No liability is accepted for incorrect use of product.

WARRANTY: Guarantee is 12 months from purchase date, proof of which will be required for any claim.

INFORMATION: Call us for a copy of our latest catalogue on 01284 757525 and leave your full name and address including your postcode.



Sole U.K. Distributor
Sealey Group
Bury St. Edmunds
Suffolk.



01284 757500

01284 703534



www.sealey.co.uk



sales@sealey.co.uk